




Notes

1. 25mm thickness of 0/6mm size close graded surface course to Clause 912.
2. 100mm thickness of 0/20mm size dense binder course to Clause 906.
3. 100mm thickness of MOT Type 1 sub-base.
4. Crossfall is 3% towards carriageway unless otherwise specified.
5. For precast concrete kerb, see Drawing No. SD/11/2.
6. Concrete bed and backing to Grade ST3 to Clause 2602.
7. Mortar bed to be Class 1 to Clause 2404 thickness 10-40mm to Clause 1101.
8. Precast concrete kerbs and edgings to BS 7263.
9. Prepared formation to be sprayed with an approved weed killer.

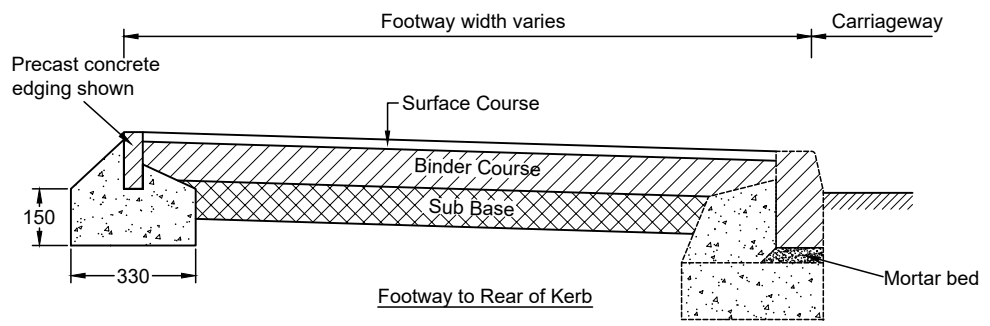

Rev: AMENDMENT DETAILS Date: Description: Approved by:

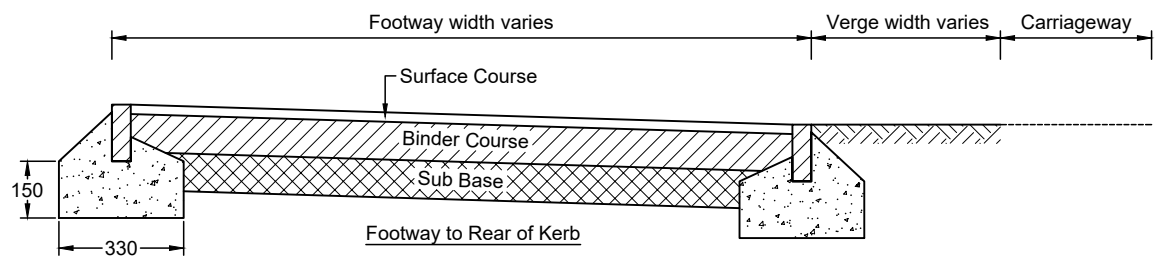

Checked by: GP Approved by: SB

ISSUED 12/05/17

Typical Cross Sections - Alternative Thickness Footways

This is a typical detail and may require conversion to a full scheme specific drawing.

NOT TO SCALE
(all units in millimetres)

Disclaimer : Before making use of this detail, any designer or third party must ensure that it satisfies all requirements of the scheme to which it is being applied. Lincolnshire County Council accept no responsibility for third party use of this Standard Detail.

SD/11/4C
Standard Detail Number

Revision Number

Revision