


Notes

1. Islands and build outs may be constructed in alternative materials.
2. Deflections etc must comply with TD54

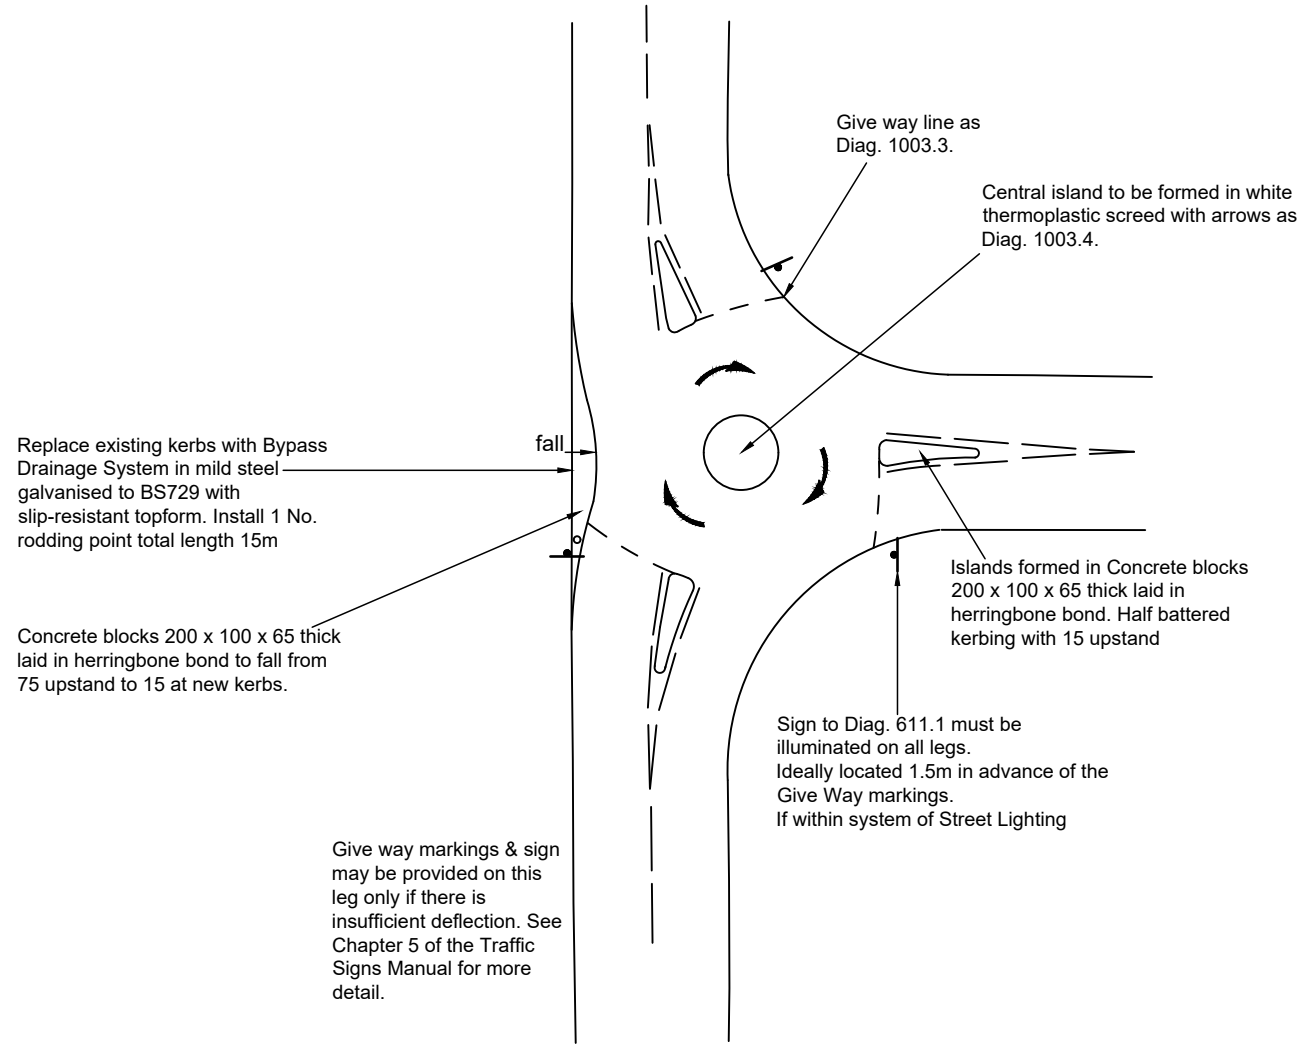

Give way line as  
Diag. 1003.3.

Central island to be formed in white  
thermoplastic screed with arrows as  
Diag. 1003.4.

Replace existing kerbs with Bypass  
Drainage System in mild steel  
galvanised to BS729 with  
slip-resistant topform. Install 1 No.  
rodding point total length 15m

Concrete blocks 200 x 100 x 65 thick  
laid in herringbone bond to fall from  
75 upstand to 15 at new kerbs.

Islands formed in Concrete blocks  
200 x 100 x 65 thick laid in  
herringbone bond. Half battered  
kerbing with 15 upstand

Sign to Diag. 611.1 must be  
illuminated on all legs.  
Ideally located 1.5m in advance of the  
Give Way markings.  
If within system of Street Lighting

Give way markings & sign  
may be provided on this  
leg only if there is  
insufficient deflection. See  
Chapter 5 of the Traffic  
Signs Manual for more  
detail.


Rev: AMENDMENT DETAILS Date: Description: Approved by:



Checked by: GP Approved by: SB

ISSUED 12/05/17

Mini-roundabout

This is a typical detail and may require conversion to a full scheme specific drawing.

NOT TO SCALE  
(all units in millimetres)

**Disclaimer :** Before making use of this detail, any designer or third party must ensure that it satisfies all requirements of the scheme to which it is being applied. Lincolnshire County Council accept no responsibility for third party use of this Standard Detail.

**SD/26/10**  
Standard Detail Number

Revision Number