


Pitching stones may be encountered above formation level during the course of the works and the supervisor will decide on site if these are to remain or be removed.

- If stones remain the area shown XXXXXX shall be regulated in dense bitumen and Geogrid reinforcement (type to be agreed) placed as shown over the full haunch and full width of new construction.

- If stones removed any remaining voids, up to formation level shall be filled and compacted with Type 1 sub-base followed by normal construction without the use of geogrid reinforcement. (type to be agreed)

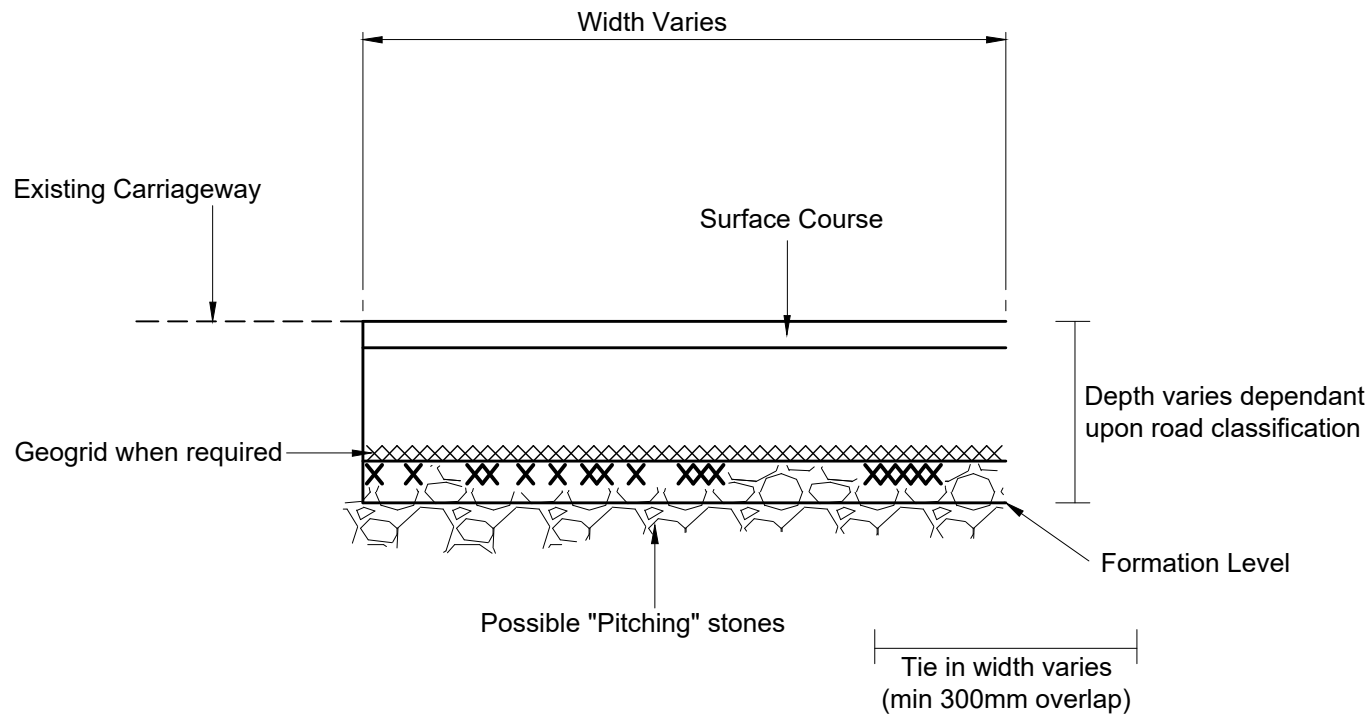

Notes

1. Appendices relate to 'Specification for Highway Works'.
2. It is often preferred to leave insitu the existing pitching stones but when pitching stones are suspected or encountered consult Lincs Lab and local District Manager for advice.

Rev:	Date:	Description:	Approved by:
AMENDMENT DETAILS			



Checked by:	GP	Approved by:	SB
ISSUED		12/05/17	

Works Encountering Stone Pitching

This is a typical detail and may require conversion to a full scheme specific drawing.

NOT TO SCALE
(all units in millimetres)

Disclaimer : Before making use of this detail, any designer or third party must ensure that it satisfies all requirements of the scheme to which it is being applied. Lincolnshire County Council accept no responsibility for third party use of this Standard Detail.

SD/26/112
Standard Detail Number

Revision Number

Revision