


Arrangement for position of mounted equipment for 4000mm wide base pole

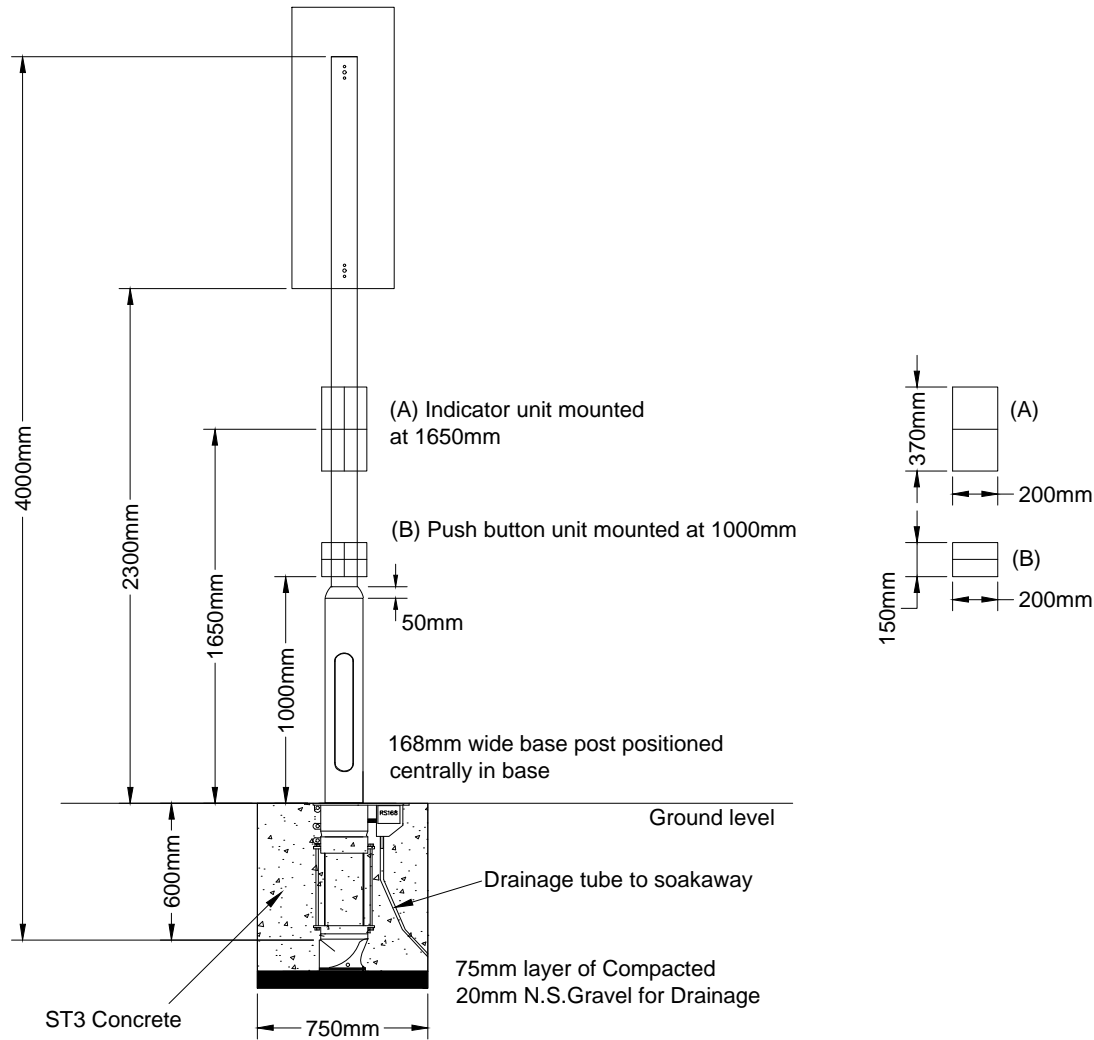

RS168/DF740 NAL Socket System

Notes

1. Posts shall be galvanised and PVC coated to a minimum thickness of 400 microns.
2. Posts shall be finished in grey or black as stated in the contract.
3. Posts shall be S355 J2H Grade steel to EN 10219 and have a wall thickness of 5mm.
4. Holes in posts shall be drilled before the posts are galvanised.
5. All drilled holes shall be fitted with removable plastic stoppers.
6. Holes shall not be drilled for push button units, these will be drilled on-site.
7. Post tops shall be fitted with a 6mm threaded brass earthing point supplied with 2 No. brass nuts and washers. It shall be positioned at right angles to the post cap assembly fixing points.
8. Vented post caps to be installed.

Traffic Signs

SD/12/22D

Revision

| | | | |
|-------------------|-------|--------------|--------------|
| Rev: | Date: | Description: | Approved by: |
| AMENDMENT DETAILS | | | |



| | | | |
|-------------|----|--------------|----|
| Checked by: | GP | Approved by: | SB |
| ISSUED | | 12/05/17 | |

Wide Base Pole Detail
For Traffic Signals

This is a typical detail and may require conversion to a full scheme specific drawing.

NOT TO SCALE
(all units in millimetres)

Disclaimer : Before making use of this detail, any designer or third party must ensure that it satisfies all requirements of the scheme to which it is being applied. Lincolnshire County Council accept no responsibility for third party use of this Standard Detail.

SD/12/22D
Standard Detail Number

Revision Number