
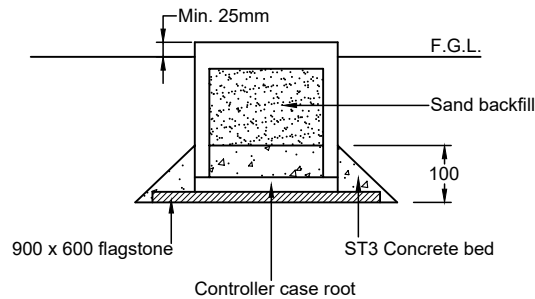


TYPICAL DETAIL

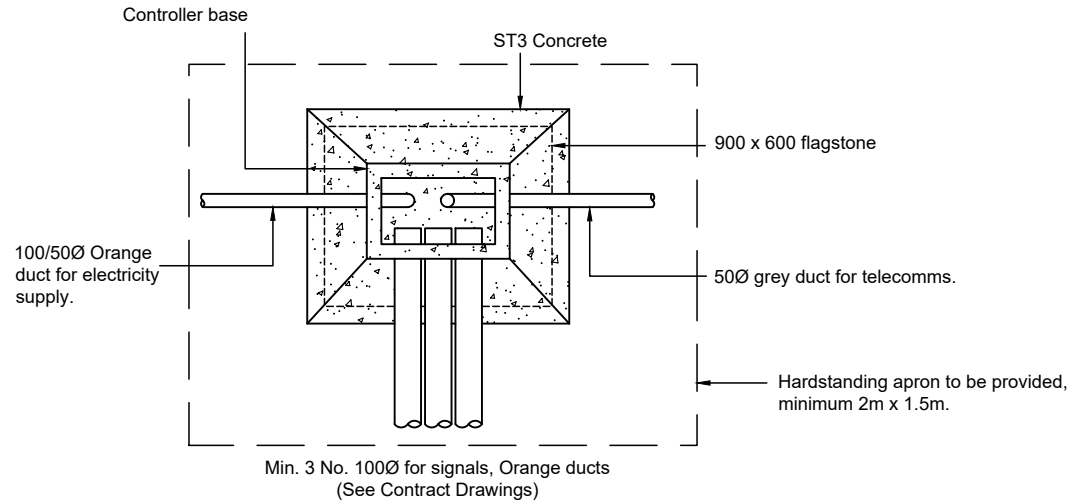

Notes

1. Controller root shall be installed to manufactures guidance.
2. Root shall be set on a Level 900 x 600 flagstone.
3. Ensure that the front / door side of the root is installed in the correct orientation and that there is adequate clearance to the underside of the door.
4. The root shall be covered to a depth of 100mm with ST3 concrete.
5. Ducts may enter from any direction, see Contract Drawings.
6. The internal root void shall be backfilled with compacted sand following installation of ducting and base sealed after installation of cables. (Signal Term Maintenance Contractor)


Rev: AMENDMENT DETAILS Date: Description: Approved by:



Checked by: GP Approved by: SB

ISSUED 12/05/17

Traffic Signals  
Controller Root Installation

This is a typical detail and may require conversion to a full scheme specific drawing.

NOT TO SCALE  
(all units in millimetres)

**Disclaimer :** Before making use of this detail, any designer or third party must ensure that it satisfies all requirements of the scheme to which it is being applied. Lincolnshire County Council accept no responsibility for third party use of this Standard Detail.

**SD/12/12**  
Standard Detail Number

Revision Number

Revision