
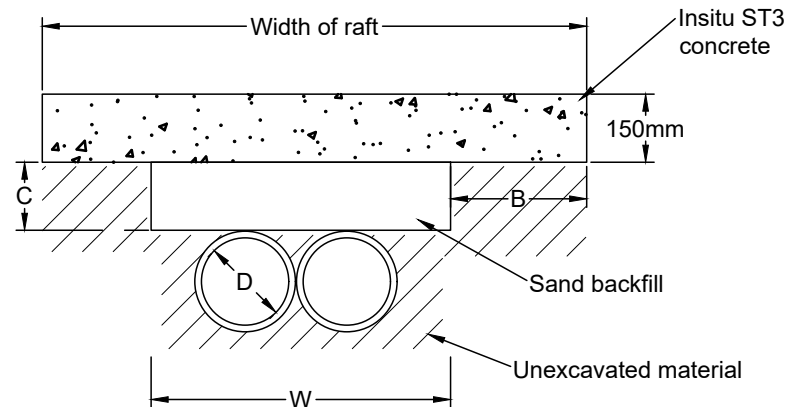


Notes

1. Minimum width of bearing (B) = C+D.
2. Minimum width of raft = W+2 (C+D).
3. Where C is minimum of 150mm and a maximum of 300mm.
4. Concrete to be ST3.
5. Sand backfill to Cl. 503

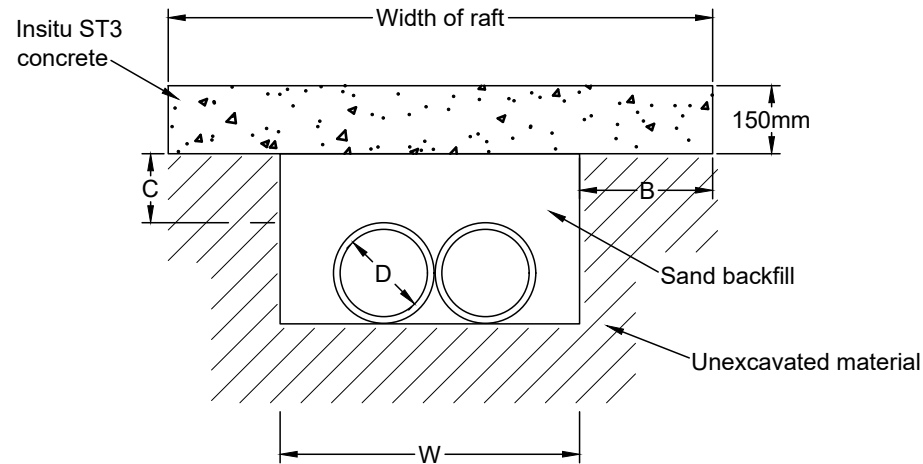

Rev:	Date:	Description:	Approved by:
AMENDMENT DETAILS			

Lincolnshire
COUNTY COUNCIL
Working for a better future

Checked by:	GP	Approved by:	SB
ISSUED		12/05/17	

**Concrete Raft Protection
for Service Ducts**

This is a typical detail and may require conversion to a full scheme specific drawing.

NOT TO SCALE
(all units in millimetres)

Disclaimer : Before making use of this detail, any designer or third party must ensure that it satisfies all requirements of the scheme to which it is being applied. Lincolnshire County Council accept no responsibility for third party use of this Standard Detail.

SD/5/21
Standard Detail Number

Revision Number