
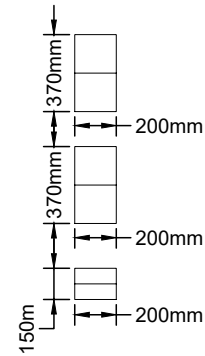


Arrangement for position of nearside indicator/push button units
For 4000mm straight pole.

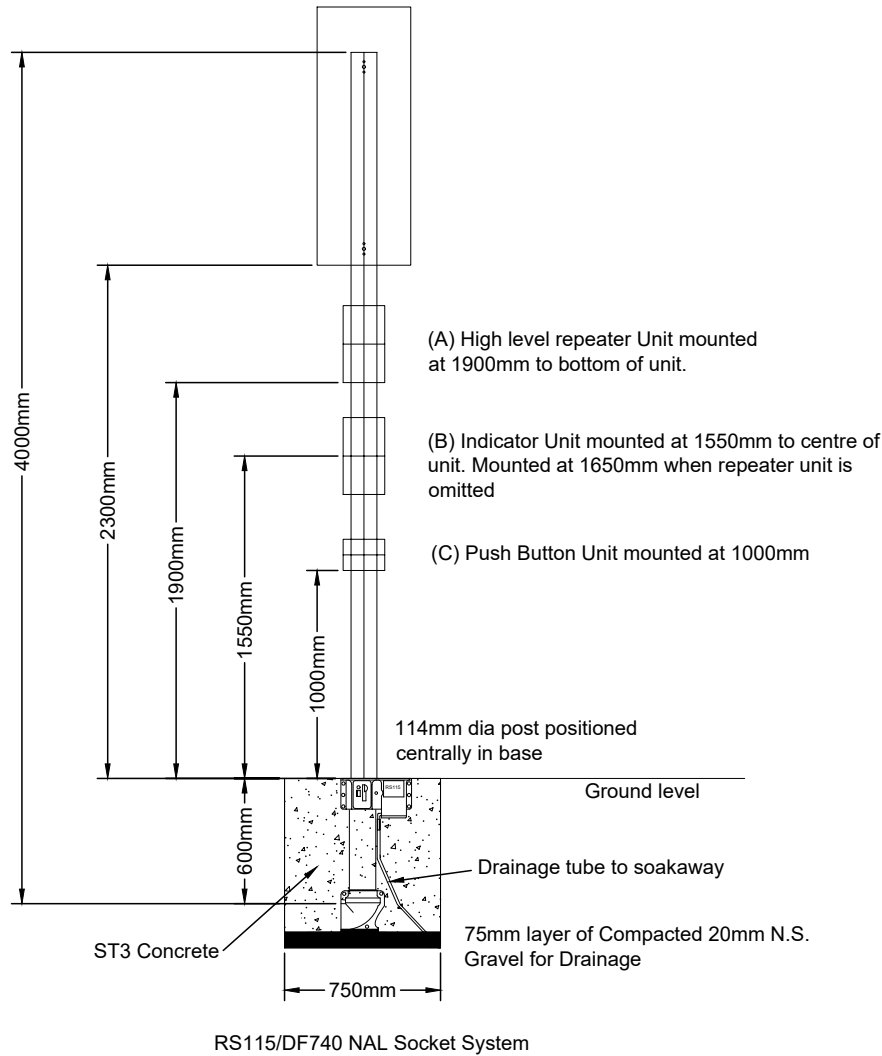

Notes

1. Posts shall be galvanised and PVC coated to a minimum thickness of 400 microns.
2. Posts shall be finished in grey or black as stated in the contract.
3. Posts shall be S355 J2H Grade steel to EN 10219 and have a wall thickness of 5mm.
4. Holes in posts shall be drilled before the posts are galvanised.
5. All drilled holes shall be fitted with removable plastic stoppers.
6. Holes shall not be drilled for push button units, these will be drilled on-site.
7. Post tops shall be fitted with a 6mm threaded brass earthing point supplied with 2 No. brass nuts and washers. It shall be positioned at right angles to the post cap assembly fixing points.

A1	19/09/18	Note 3 - EN01219 revised to EN10219	DMB
Rev:	Date:	Description:	Approved by:
AMENDMENT DETAILS			



Checked by:	GP	Approved by:	SB
-------------	----	--------------	----

ISSUED	12/05/17
--------	----------

Straight Signal Post Detail
For Traffic Signals

This is a typical detail and may require conversion to a full scheme specific drawing.

NOT TO SCALE
(all units in millimetres)

Disclaimer : Before making use of this detail, any designer or third party must ensure that it satisfies all requirements of the scheme to which it is being applied. Lincolnshire County Council accept no responsibility for third party use of this Standard Detail.

SD/12/22A
Standard Detail Number

A1
Revision Number